



Graphite Polystyrene (GPS) Rigid Foam Insulation







Halo® Interra® is coated with polypropylene laminates on both sides of the insulation. The laminates are reflective on one side, and reflective or clear on the other side.


Halo® Interra® acts as a vapor barrier while providing continuous insulation. In addition, when a sealed air gap between the reflective laminate surface and covering is provided an additional boost in R-value is provided.

BASIC USE

- Roof
- Ceiling
- Interior above-grade wall
- Interior foundation
- Above slab

Product Features

					
Stable long term thermal resistance (LTTR) R5 nominal	Environmentally responsible	Cost-efficient insulation	Water-resistant	Vapor barrier	Air barrier

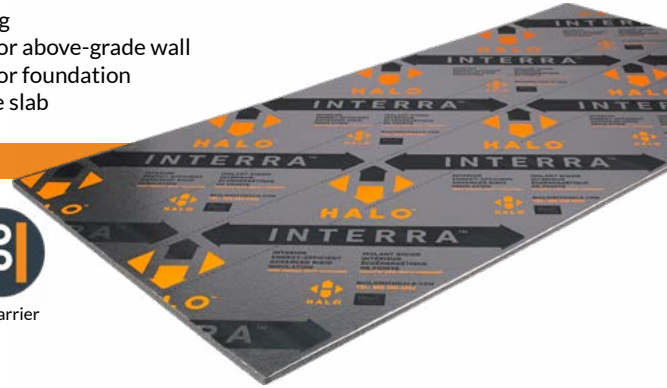

Environmental & Sustainability

- Produced without the use of chlorofluorocarbon (CFCs), hydrochlorofluorocarbon (HCFCs) or formaldehyde. As a result, Halo Interra® will not produce harmful emissions to the environment.
- BASF Neopor 5300 Plus is recognized as a product that produces low chemical emissions by the Greenguard Environment Institute – Neopor 5300 Plus is Greenguard Indoor Air Quality Certified® and Greenguard Children & SchoolsSM Certified product.
- Contributes to LEED® v4 credits for green building projects.



Performance Criteria

		Halo® Interra® Type I (Type 1)	
		COMPLIANCE	ASTM C578^b (CAN/ULC S701^b)
THERMAL RESISTANCE^a	75°F (24°C)	ASTM C518	R-5 (RSI 0.88)
	40°F (4.4°C)	CAN/ULC S701	R-5.2 (RSI 0.92)
PHYSICAL	Compressive Resistance at 10% def., Min.	ASTM D1621	10 psi (70 kPa)
	Flexural Resistance Min.	ASTM C203	25 psi (170 kPa)
	Dimensional Stability Max.	ASTM D2126	2%
	Air Leakage	ASTM E2178	0.0002 cfm/ft ² (0.0010 L/s•m ²) at 1" (25.4mm) thickness
MOISTURE	Water Vapor Permeance Max. ^d	ASTM E96	0.03 perms (1.7 ng/Pa•s•m ²)
	Water Absorption Max.	ASTM C272	1.1%
FIRE	Flame Spread Index, Max.	ASTM E84	<=25(<230)
	Smoke Developed Index, Max.	CAN/ULC S102.2	<=450 (>500)
	Thickness, Max.		4" (102mm)
	Density, Max.		2.2 pcf (35 kg/m ³)
	Oxygen Index, Min.	ASTM D2863	24%

a. At 1" nominal thickness (actual thickness = 1.06" (26.92mm))
 b. Unless noted otherwise, properties are based on 1" (25.4mm) thickness without laminate. Data provided by BASF
 c. Contact your local Logix Brands representative for availability
 d. Based on independent testing conducted by QAI. Water vapor permeance properties tested with laminate and 1" thick GPS

Technical Information

- Halo® products should be protected from reflective sunlight or prolonged solar exposure. Always keep stored Halo® products tarped or covered to protect from weather. Do not use a clear plastic covering film. When possible, store indoors.
- Until the building is enclosed with the wall, subfloor or roof sheathing, the following recommendations will help ensure installed Interra® are protected from thermal expansion, and minimize damage due to reflective sunlight or prolonged solar exposure.
 - Remove or cover any surface that is casting a reflection on installed Interra®, or shield the affected Interra® products. (Reflections can also come through the building enclosure through openings or non-opaque areas, such as windows).
 - Cover Interra® if left exposed for more than 30 days. Faded printing on Interra® laminates is normal and will not degrade its properties.
 - Ensure all butt joints are tightly fitted, and apply sheathing tape as soon as possible. Immediately tape seal or temporarily cover all joints of inside corners until tape sealant is applied.
- Prior to use of adhesives, sealants or other similar products with GPS insulation please verify the compatibility with adhesive manufacturers.
- Halo® Interra® products are made of combustible materials and may need to be protected from high heat sources. In additional thermal barrier may be required when used in the interior of a building. Refer to the local building code for appropriate protection and thermal barrier requirements.

Sizes

	BOARD THICKNESS	BOARD SIZE
Halo Interra®	5/8" (16mm), 1" (25.4mm), 1.5" (38.1mm), 2" (50.8mm).	4' x 8' (1220mm x 2440mm)

Custom sizes are available upon request.

Packaging

Halo® packaging and bundle sizes vary. Please contact your local Halo® manufacturer or dealer to confirm your local packaging specifications and available bundle sizes.

Manufacturers

- AMC Foam Technologies Inc. 35 Headingley St. Headingley Manitoba, R4H 0A8 877-789-7622
- Beaver Plastics Ltd., 7-26318-TWP RD 531A, Acheson, Alberta, T7X 5A3 888-453-5961
- Form Systems, Inc. 330 Cain Drive Haysville, Kansas 67060 1-888.838.5038
- Perma R Products Inc. 2604 Sunset Dr. Grenada, MS, 38901 800-647-6130
- Perma R Products Inc. 106 Perma R Rd. Johnson City, TN, 37604 800-647-6130
- Progressive Foam Technologies 1 Southern Gateway Dr. Gnadenuhnten, OH, 44629 800-860-3626

Applicable Standards

ASTM C578	Standard Specification for Rigid, Cellular Polystyrene Thermal Insulation.
ASTM C518	Standard Test Method for Steady-state Thermal Transmission Properties by Means of the Heat Flow Meter Apparatus.
ASTM D1621	Standard Test Method for Compressive Properties of Rigid Cellular Plastics.
ASTM D2842	Standard Test Method for Water Absorption of Rigid Cellular Plastics.
ASTM E84	Standard Test Method for Surface Burning Characteristics of Building Materials.
ASTM E96	Standard Test Methods for Water Vapor Transmission of Materials.
ASTM C203	Standard Test Methods for Breaking Load and Flexural Properties of Block-Type Thermal Insulation.
ASTM D2863	Standard Test Method for Measuring the Minimum Oxygen Concentration to Support Candle-Like Combustion of Plastics (Oxygen Index).
ASTM E2178	Standard Test Method for Air Permeance of Building Materials.
CAN/ULC-S701	Standard for Thermal Insulation, Polystyrene, Boards and Pipe Covering.
CAN/ULC S102.2	Surface Burning Characteristics of Flooring, Floor Covering and Miscellaneous Materials and Assemblies.
ASTM C272	Standard Test Method for Water Absorption of Core Materials for Sandwich Constructions

Limited Warranty

Subject to the terms and conditions contained in the Limited Warranty, the Manufacturer (as defined herein) warrants that if the representative thermal insulation value of the Neopor® bead in the Halo® insulation product Halo® Interra®, Halo® Exterra®, or Halo® Subterra® (the "Product" or "Products") varies from the published thermal resistance, the Manufacturer will, when a claim under the attached Limited Warranty is made within fifteen (15) years from the date of manufacture, refund the original purchase price to the first owner of a structure in which the Product has been installed (the "Owner"). For the purposes of the Limited Warranty, the original purchase price of the Product shall be exclusive of taxes and all other costs, including builder mark ups, labor costs and costs to remove the original Product and replace it with new Product.

For more information refer to the [Halo Zero Thermal Drift Guarantee](#).

Disclaimer of Liability

References to "Logix Brands" or the "Company" mean the manufacturer selling the Products to Owner (the "Manufacturer") unless otherwise expressly noted. NO EXPRESS WARRANTIES ARE GIVEN EXCEPT FOR THE ATTACHED LIMITED WARRANTY. ALL OTHER WARRANTIES, EXPRESS, STATUTORY AND IMPLIED, INCLUDING BUT NOT LIMITED TO, WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, ARE EXPRESSLY DISCLAIMED. The Owner assumes all risks as to the use of the material. As the Manufacturer has no control over installation design and workmanship, accessory materials or application conditions, the Manufacturer does not warranty the performance or results of any installation containing the Products. The Products must be handled and installed according to the instructions outlined in the applicable Product installation guide and used only for the particular purposes recommended in the Halo Product literature available on [BuildWithHalo.com](#).

Technical Support

For North American technical inquires please contact Francis Roma (froma@logixbrands.com) or Tyler Simpson (tsimpson@logixbrands.com).

Code Evaluation Approvals

- CCMC 14004-L
- QAI Listing B1031-2

