




Graphite Polystyrene (GPS) Rigid Foam Insulation

Halo® Subterra® are rigid foam insulation boards made from graphite infused expanded polystyrene (GPS). The boards are coated with a polypropylene woven fabric on both sides and the tough woven fabric laminate makes Subterra® strong and durable against repeated loading conditions.

Suitable for use in residential, multi-residential, commercial, and industrial buildings for below-slab applications providing the air and vapor retarder, void form protection, and continuous insulation.

BASIC USE

- Below-grade exterior walls
- Under-slab
- Perimeter insulation

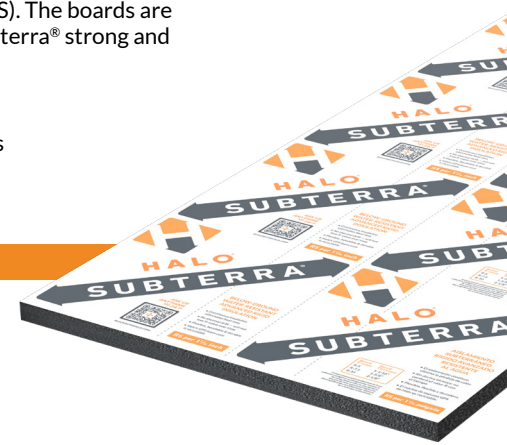

Product Features



Stable long term thermal resistance (R4.7 per inch (25.4mm))



Environmentally responsible



Flexible



Durable



Vapor retarder

Environmental & Sustainability

- Produced without the use of chlorofluorocarbon (CFCs), hydrochlorofluorocarbon (HCFCs) or formaldehyde. As a result, Halo® Subterra® Board will not produce harmful emissions to the environment.

Physical Properties

| | | | Subterra® 16 Type II (Type 2) | Subterra® 20 Type XIII (Type 3) | Subterra® 25 Type IX (Type 3) | Subterra® 30 Type IX (Type 3) | Subterra® 40 Type XIV (Type 3) | |
|--------------------|--|-------------------------------|--|------------------------------------|----------------------------------|----------------------------------|-----------------------------------|--------------------------|
| | | | COMPLIANCE | | | | | ASTM C578 (CAN/ULC S701) |
| THERMAL RESISTANCE | 75°F (24°C) | ASTM C518 | R-4.7 | | | | | |
| | 40°F (4.4°C) | CAN/ULC S701 | 0.83 RSI | | | | | |
| PHYSICAL | Compressive Resistance at 10% def., Min. | ASTM D1621 | 16 psi (110 kPa) | 20 psi (140 kPa) | 25 psi (172 kPa) | 30 psi (210 kPa) | 40 psi (276 kPa) | |
| | Flexural Resistance Min. | ASTM C203 | 35 psi (240 kPa) | 45 psi (300 kPa) | 50 psi (300 kPa) | 50 psi (300 kPa) | 60 psi (300 kPa) | |
| | Dimensional Stability Max. | ASTM D2126 | 2% | | | | | |
| MOISTURE | Water Vapor Permeance Max. ^a | ASTM E96 | 0.08 perms (4.4 ng/Pa-s-m ²) | | | | | |
| | Water Absorption Max. | ASTM C272 | 1.1% | | | | | |
| FIRE | Flame Spread Index, Max. | ASTM E84 (CAN/ULC S102.) | 5 (230) | | | | | |
| | Smoke Developed Index, Max. | | 25 (>500) | | | | | |
| | Thickness, Max. | 5" (102mm) | | | | | | |
| | Density, Max. | 2 pcf (32 kg/m ³) | | | | | | |
| | Oxygen Index, Min. | ASTM D2863 | 24% | | | | | |

a. Based on Independent testing conducted by QAI with laminate and 1" thick GPS



THE ADVANCED GRAPHITE INSULATION SYSTEM

BuildWithHalo.com



Technical Information

- Halo® products should be protected from reflective or direct UV exposure. Always keep stored Halo® products tarped or covered to protect from weather, and when possible store indoors. Do not use a clear plastic covering film.
- Until Halo® Subterra® Protection Board is covered the following recommendations will help ensure installed products maintain manufactured dimensions.
- Remove or cover the surface that is casting a reflection on installed Halo® products, or shield the affected Halo® products.
- Cover Halo® Subterra® Protection Board if left exposed for more than 30 days. Faded printing on Halo® laminates is normal and will not degrade the products properties.
- Ensure all butt joints are tightly fitted and apply sheathing tape or liquid sealant as soon as possible.
- Immediately tape seal or temporarily cover all joints of inside corners until tape sealant is applied.
- Prior to use of adhesives, sealants or other similar products with GPS insulation please verify the compatibility with adhesive manufacturers.
- Halo® Subterra® Protection Board products are made of combustible materials and may need to be protected from high heat sources. In addition, a thermal barrier may be required when used on the interior of a building. Refer to the local building code for appropriate protection and thermal barrier requirements.

Sizes

| | BOARD THICKNESS | BOARD SIZE |
|---------------|--|---------------------------|
| Halo Subterra | 1-1/16" (27mm), 1-5/8" (41mm), 2-1/8" (54mm) | 4' x 8' (1230mm x 2460mm) |

Note: Custom sizes are available upon request. Please contact the local Logix Brands representative.

Packaging

Halo® packaging and bundle sizes vary. Please contact your local Halo® manufacturer or dealer to confirm your local packaging specifications and available

Manufacturers

- AMC Foam Technologies Inc.
35 Headingley St.
Headingley Manitoba, R4H 0A8
877-789-7622
- Beaver Thermal Solutions Inc.
11581-272 St.
Acheson, Alberta, T7X 6E9
888-453-5961
- Beaver Thermal Solutions Inc.
#215-44393 Simpson Rd.
Chilliwack, BC V2R 5M3
888.453.5961

Applicable Standards

| | |
|--------------------------------------|---|
| ASTM C578 | Standard Specification for Rigid, Cellular Polystyrene Thermal Insulation. |
| ASTM C518 | Standard Test Method for Steady-state Thermal Transmission Properties by Means of the Heat Flow Meter Apparatus. |
| ASTM D1621 | Standard Test Method for Compressive Properties of Rigid Cellular Plastics. |
| ASTM D2842 | Standard Test Method for Water Absorption of Rigid Cellular Plastics. |
| ASTM E84 | Standard Test Method for Surface Burning Characteristics of Building Materials. |
| ASTM E96 | Standard Test Methods for Water Vapor Transmission of Materials. |
| ASTM C203 | Standard Test Methods for Breaking Load and Flexural Properties of Block-Type Thermal Insulation. |
| ASTM D2863 | Standard Test Method for Measuring the Minimum Oxygen Concentration to Support Candle-Like Combustion of Plastics (Oxygen Index). |
| CAN/ULC-S701 | Standard for Thermal Insulation, Polystyrene, Boards and Pipe Covering. |
| AATCC Test Method 127 ICC ES AC71 | Acceptance Criteria for Foam Plastic Sheathing Panels Used as Weather Resistive Barriers. |
| ASTM C272 | Standard Test Method for Water Absorption of Core Materials for Sandwich Constructions |
| ASTM D2126 | Standard Test Method for Response of Rigid Cellular Plastics to Thermal And Humid Aging |

Limited Warranty

Subject to the terms and conditions contained in the Limited Warranty, the Manufacturer (as defined herein) warrants that if the representative thermal insulation value of the Halo® insulation products Halo® Interra®, Halo® Exterra®, or Halo® Subterra® (the "Product" or "Products") varies from the published thermal resistance, the Manufacturer will, when a claim under the attached Limited Warranty is made within fifteen (15) years from the date of manufacture, refund the original purchase price to the first owner of a structure in which the Product has been installed (the "Owner"). For the purposes of the Limited Warranty, the original purchase price of the Product shall be exclusive of taxes and all other costs, including builder mark ups, labor costs and costs to remove the original Product and replace it with new Product.

For more information refer to the [Halo Zero Thermal Drift Guarantee](#).

Disclaimer of Liability

References to "Logix Brands" or the "Company" mean the manufacturer selling the Products to Owner (the "Manufacturer") unless otherwise expressly noted. NO EXPRESS WARRANTIES ARE GIVEN EXCEPT FOR THE ATTACHED LIMITED WARRANTY. ALL OTHER WARRANTIES, EXPRESS, STATUTORY AND IMPLIED, INCLUDING BUT NOT LIMITED TO, WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, ARE EXPRESSLY DISCLAIMED. The Owner assumes all risks as to the use of the material. As the Manufacturer has no control over installation design and workmanship, accessory materials or application conditions, the Manufacturer does not warranty the performance or results of any installation containing the Products. The Products must be handled and installed according to the instructions outlined in the applicable Product installation guide and used only for the particular purposes recommended in the Halo Product literature available on [BuildWithHalo.com](#).

Technical Support

For North American technical inquires please contact: techdepart@logixbrands.com

Code Evaluation Approvals

- CCMC 14004-L
- QAI Listing B1031-2



THE ADVANCED GRAPHITE INSULATION SYSTEM

BuildWithHalo.com

